

**sensor**  
ACCESS TECHNOLOGY

# SensorProx Readers

The SensorProx range of RF proximity readers are the most complete range of readers on the market offering a suitable product for every application. All the SensorProx readers are compatible with all Sensor controllers making them very versatile and practical.

## Key Features

- Professional range for all applications
- Easy Installation
- Vandal resistant cast metal options
- Optical tamper switch
- Backlit keypad
- IP65 rated for external use
- Compatible with full Sensor range

### SP-MINI

Small compact reader ideal for most internal and external applications. Thin profile makes it ideal for door frames.

### SP-SG

The size and fixings of the reader fits into a standard UK single gang electrical back box making it simple and neat to terminate. It is ideal for both internal and external applications.

### SP-VRS

This reader is ideally suited for harsh environments as it is constructed from metal in one solid cast. Its low profile is attractive

### SP-KPV


Ideal solution for card and pin use offering a very attractive solution with metal keys. This reader is very robust and comes as standard with backlighting allowing it to be used at night time. It is ideal for both internal and external applications.

### KPV

With the same build quality and features as the SP-KPV. This reader offers the option of PIN only applications.



**SENSORPROX**

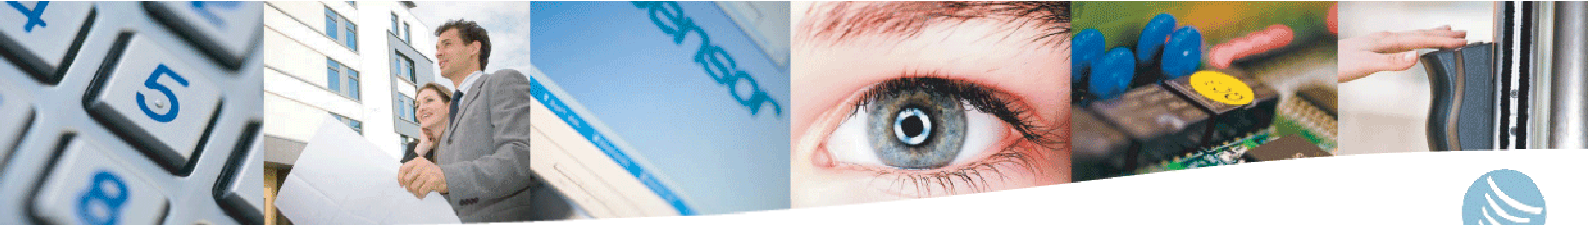

**sensor**  
ACCESS TECHNOLOGY

# SensorProx Readers

	SP-MINI	SP-SG	SP-VRS	KPV	SP-KPV
<b>Dimensions (mm)</b>	80(H)x40(W) x13(D)	89(H)x89(W) x15(D)	120(H)x76(W) x27(D)	120(H)x76(W) x27(D)	120(H)x76(W) x27(D)
<b>Weight</b>	67g	110g	440g	440g	440g
<b>Read Range</b>	80mm	100mm	65mm	None	65mm
<b>Input Current (Standby)</b>	35mA @ 12vDC	35mA @ 12vDC	35mA @ 12vDC	85mA @ 12vDC	85mA @ 12vDC
<b>Input Current (Maximum)</b>	50mA @ 12vDC	50mA @ 12vDC	50mA @ 12vDC	145mA @ 12vDC	145mA @ 12vDC
<b>Voltage range</b>	5 to 16 vDC from a regulated supply	5 to 16 vDC from a regulated supply	5 to 16 vDC from a regulated supply	5 to 16 vDC from a regulated supply	5 to 16 vDC from a regulated supply
<b>Colour</b>	Black	Black	Silver & Black	Silver	Silver & Black
<b>Material</b>	UV resistant poly-carbonate plastic	UV resistant poly-carbonate plastic	Metal	Metal	Metal
<b>LED Indicator</b>	One, Bi-Coloured	One, Bi-Coloured	One, Bi-Coloured	Two, Coloured	Two, Coloured
<b>Buzzer</b>	Yes	Yes	Yes	Yes	Yes
<b>Operating Temperature</b>	-12°C to 60°C	-12°C to 60°C	-12°C to 60°C	-12°C to 60°C	-12°C to 60°C
<b>Max Range to controller</b>	100m	100m	100m	100m	100m
<b>To extend cable use</b>	Belden 9421 (22AWG, non-twisted)	Belden 9421 (22AWG, non-twisted)	Belden 9421 (22AWG, non-twisted)	Belden 9421 (22AWG, non-twisted)	Belden 9421 (22AWG, non-twisted)

**Contact us Today**

Sensor Access Technology Ltd



+ 44 (0)1273 242355



sales@sensoraccess.co.uk

[www.sensoraccess.co.uk](http://www.sensoraccess.co.uk)